


ChemSep Tutorial: Distillation with Hypothetical Components

Harry Kooijman and Ross Taylor

Here we use *ChemSep* to solve a complex multicomponent distillation problem presented in a paper entitled *Multistage Multicomponent Separation Calculations using Thermodynamic Properties Evaluated by the SRK/PR Equation of State*, by M.K. Shah and P.R. Bishnoi ([Canadian Journal of Chemical Engineering, 56, pp478-486, 1978](#)).

The specifications for this problem provided in the paper cited are summarized in the figure below.

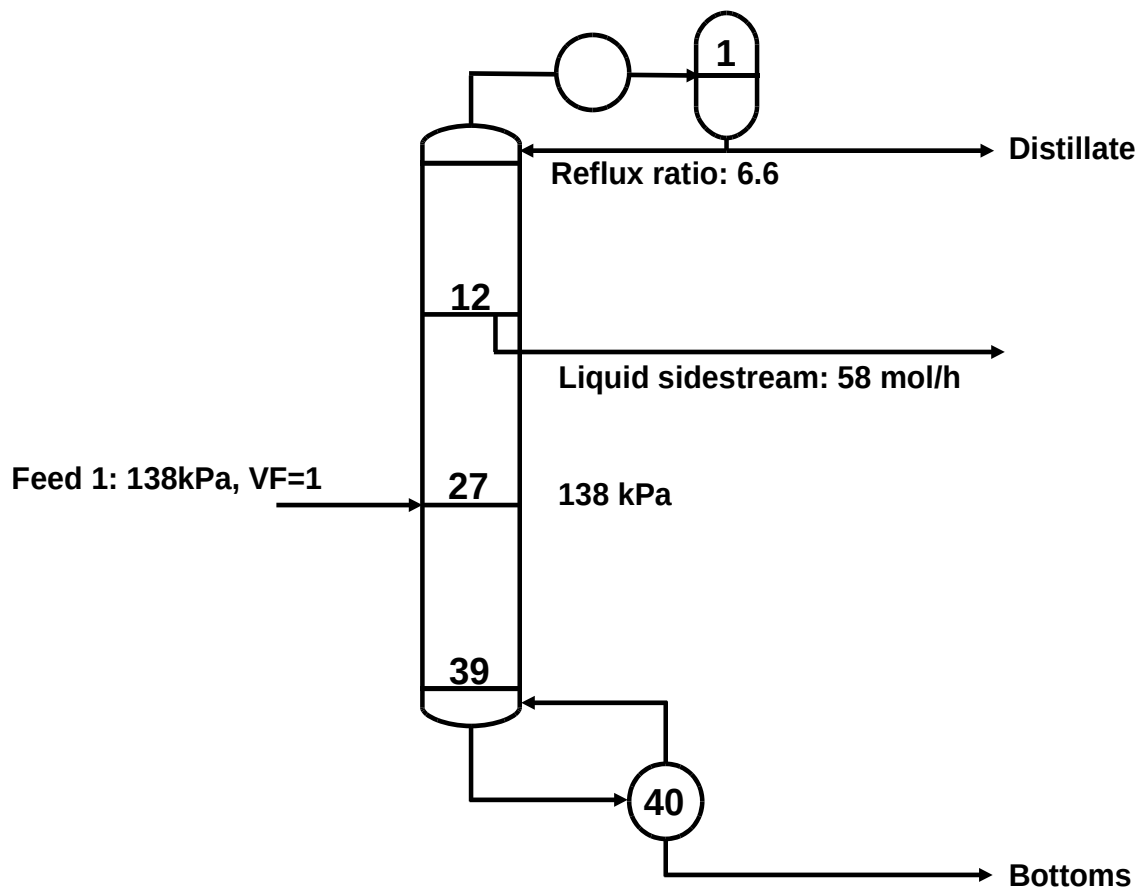

This column is used to recover a paraffin cut from straight kerosene. The feed is a mixture of “hypothetical” compounds with the following flowrates:

Mole flows (mol/h)	
Hyp-A	12.900
Hyp-B	11.600
Hyp-C	5.550
Hyp-D	5.200
Hyp-E	10.500
Hyp-F	10.030
Hyp-G	9.650
Hyp-H	9.370
Hyp-I	8.770
Hyp-J	5.080
Hyp-K	3.340
Hyp-L	7.980

Shah and Bishnoi do not actually specify a time unit in their paper; all flows are given in mol. We have assumed a time unit of one hour here, but note that all relative flows are unchanged by this arbitrary choice.

The specifications made in this case are summarized in the table below:

Variable	Number	Value
Number of stages	1	40
Feed stage locations	1	27
Component flows in feed 1	$c = 12$	See table above
Feed 1 pressure	1	138 kPa
Feed 1 vapor fraction	1	1
Pressure on all stages	$N = 40$	138 kPa
Heat duty on all other stages except reboiler and condenser	$N - 2 = 38$	0
Reflux ratio	1	6.6
Liquid sidestream flow from stage 3	1	58 mol/h
Total	96	

In addition, we have assumed that the pressure of the reflux divider is the same as the pressure of the condenser, the heat loss from the reflux divider is zero, and the reflux temperature is the boiling point of the condensed overhead vapor.

The number of variables specified above is one less than is actually required to satisfy the total number of degrees of freedom for this column. Shah and Bishnoi do not state their final specification; we have, therefore chosen to specify the bottoms flow rate to be consistent with the values given in their stream table.

Property Data Creation

To proceed we must first create a databank of the properties of the various hypothetical compounds that make up the mixture to be separated in this column. Shah and Bishnoi tell us that the feed mixture is divided into twelve hypothetical components based on its True Boiling Point (TBP) curve and these components have the derived properties shown in the table below.

Name	Tb (C)	API Gravity	Tb (K)	SG
Hyp-A	126	56.92	399.15	0.75
Hyp-B	156	53.23	429.15	0.77
Hyp-C	170	51.08	443.15	0.78
Hyp-D	178	50.14	451.15	0.78
Hyp-E	186	48.98	459.15	0.78
Hyp-F	198	47.61	471.15	0.79
Hyp-G	212	46.26	485.15	0.8
Hyp-H	224	44.71	497.15	0.8
Hyp-I	238	44.06	511.15	0.81
Hyp-J	245	42.33	518.15	0.81
Hyp-K	257	40.64	530.15	0.82
Hyp-L	280	38.16	553.15	0.83

The first three columns of this table are directly from the paper by Shah and Bishnoi, the fourth column represents the conversion of the normal boiling point in Celcius (column 2) to Kelvin. The fifth column contains the results of the conversion of the API gravity in column 3 to the specific gravity from the formula:


$$SG = \frac{141.5}{API + 131.5}$$

The reasons for carrying out this conversion will soon become clear.


Modeling a system such as this using the Peng-Robinson or SRK equations of state – which is what we are about to do – requires the creation of a databank with the necessary physical properties. This includes the critical temperature and pressure, the acentric factor, and the ideal gas heat capacity, for example.

ChemSep can create the necessary databank for us given the information in the table above.

Start the Pure Compound Data (PCD) manager by clicking on the PCD manager icon (the benzene ring). Click on *File* and then click *New* to create a completely new databank (we do not advocate adding hypothetical compounds to the existing databank of data for real compounds).

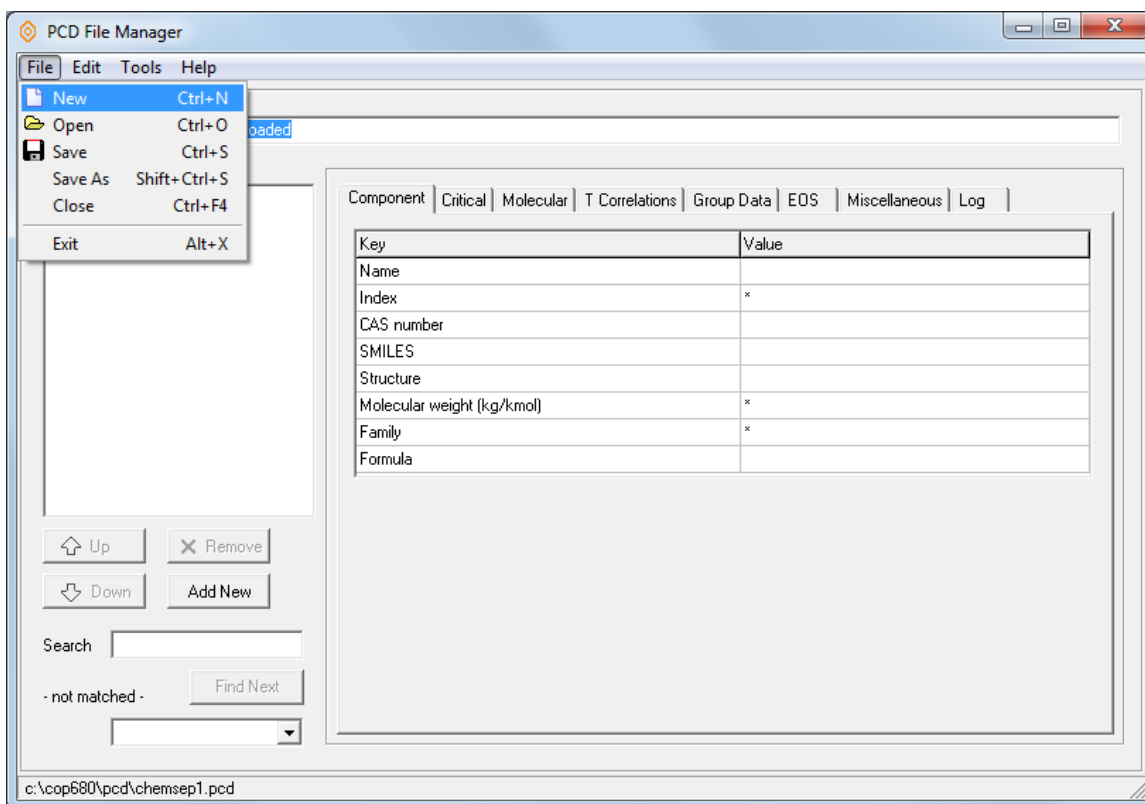

Next, click on Edit and then on *Add Pseudo*:

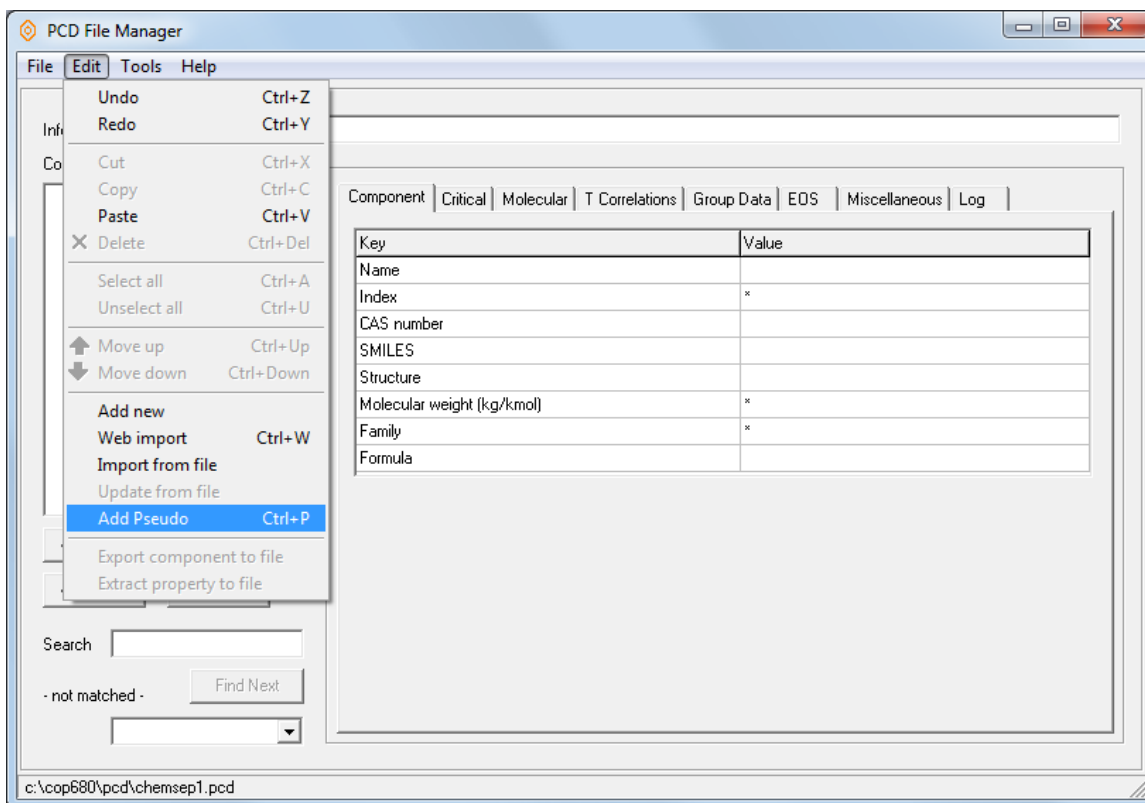

This brings up a separate panel that will allow us to add pseudo-compounds or hypothetical compounds to the databank:

Pseudo Component Generation

Tb + SG Reverse order

Tc

Pc

Vc

w

Mw

Name

CplG

ViscL

kL

CAS#

Tb (K)	SG

Now we need to record the normal boiling point and specific gravity of our collection of hypothetical compounds given in the table above (now it will be clear why it was necessary to convert the boiling point data to Kelvin and the API gravity to specific gravity).

To enter this information click in the table to the upper right of the panel shown above and start typing. Every time you type something new in the first line a new line will appear below it, ready for the data for the next hypothetical compound:

Pseudo Component Generation

Tb + SG Reverse order

Tc

Pc

Tb (K)	SG
399.15	

There is, however, a quicker way to record the data if we have used a spreadsheet program to record the basic data and do any necessary data conversions (as we have for this problem).

Highlight the block of relevant data in the spreadsheet:

	A	B	C	D	E
1					
2		Tb(C)	API	Tb (K)	SG
3	Hyp-A	126.0	56.92	399.15	0.751
4	Hyp-B	156.0	53.23	429.15	0.766
5	Hyp-C	170.0	51.08	443.15	0.775
6	Hyp-D	178.0	50.14	451.15	0.779
7	Hyp-E	186.0	48.98	459.15	0.784
8	Hyp-F	198.0	47.61	471.15	0.790
9	Hyp-G	212.0	46.26	485.15	0.796
10	Hyp-H	224.0	44.71	497.15	0.803
11	Hyp-I	238.0	44.06	511.15	0.806
12	Hyp-J	245.0	42.33	518.15	0.814
13	Hyp-K	257.0	40.64	530.15	0.822
14	Hyp-L	280.0	38.16	553.15	0.834
15					

Press *Ctrl-C* and click in the first cell of the table to the top right of the *Pseudo Component Generation* panel. Then press *Ctrl-V*.

Pseudo Component Generation

Tb + SG Reverse order

Tc

Pc

Vc

w

Mw

Name T[Tb][C]

[Tb][SG][Mw][API][K][C][H][S][EE]

CplG

Tb (K)	SG
399.15	0.751
429.15	0.766
443.15	0.775
451.15	0.779
459.15	0.784
471.15	0.790
485.15	0.796
497.15	0.803
511.15	0.806
518.15	0.814
530.15	0.822
553.15	0.834

The next task is to select the methods to be used to estimate the properties listed on the left hand half of this panel. Shah and Bishnoi report using the method of Cavett for the critical temperature and pressure, but they do not tell us what they used for the acentric factor or for any of the other properties. The image below shows what we used for this exercise:


Tb (K)	SG
399.15	0.751
429.15	0.766
443.15	0.775
451.15	0.779
459.15	0.784
471.15	0.790
485.15	0.796
497.15	0.803
511.15	0.806
518.15	0.814
530.15	0.822
553.15	0.834

Note, in particular, the cell labeled *Name*. This cell specifies how the hypothetical compounds will be named in the data file soon to be created. Compound names can be generated using a variety of labels including:

- Normal boiling point - [Tb]
- Specific gravity - [SG]
- Molecular weight - [Mw]
- API gravity - [API]
- Numerical exponent (01, 02, etc) - [EE]

In this case we have elected to name the compounds Hypo-EE where the EE is the sequence of numbers starting at 01.

Click on the button *Generate* to close this window and create the compound data records which will appear in *PCDmanager* as shown below:

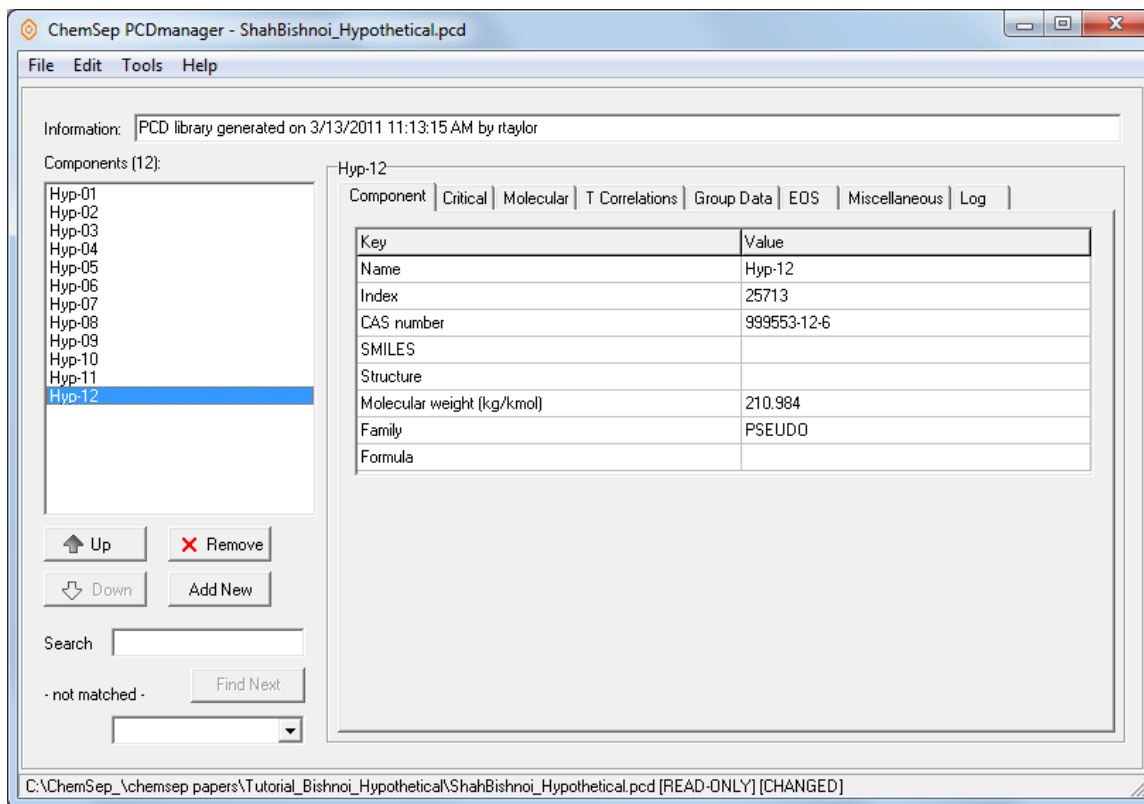

Note the list of compound names in the panel to the left of the screen above. To the right appears the first tab showing compound name, index number, CAS number, molecular weight, and compound family, all generated using the methods selected earlier or designated automatically by the compound data manager. All compounds generated in this way are automatically defined as belonging to the family of *pseudo-compounds*. The CAS number is created automatically according to the formula shown on the pseudo-compound generation panel shown above. Pseudo-compounds do not normally have a genuine CAS number, but this number is used for internal purposes by *ChemSep*, so it is necessary to create one here.

The entire set of molecular weights is in reasonable agreement with those given by Shah and Bishnoi although they do not specify exactly how those were calculated. The method used here (that of Riazi and Daubert, 1980) was not available to Shah and Bisnoi because their paper was published two years earlier. We leave it as an exercise for our readers to see how much difference there is with the other methods of estimating the various properties.

Other properties (including the very important critical temperature and pressure and the ideal gas heat capacity are shown in the series of screen images below that illustrate other tab panels in *PCDmanager*.

PCD File Manager

File Edit Tools Help

Information: PCD library generated on 3/12/2011 8:41:41 PM by rtaylor

Components (12):

- Hyp-01
- Hyp-02
- Hyp-03
- Hyp-04
- Hyp-05
- Hyp-06
- Hyp-07
- Hyp-08
- Hyp-09
- Hyp-10
- Hyp-11
- Hyp-12

Buttons: Up, Remove, Down, Add New

Search: - not matched - Find Next

Hyp-12

Component Critical Molecular T Correlations Group Data EOS Miscellaneous Log

Key	Value
Critical temperature (K)	735.821
Critical pressure (Pa)	1.75839E+06
Critical volume (m3/kmol)	0.904049
Critical compressibility factor (-)	0.259836
Normal boiling point (K)	553.150
Melting point (K)	*
Triple point temperature (K)	*
Triple point pressure (Pa)	*

Estimate: Click here to estimate properties (no UNIFAC) Apply

Order by property Order by method

c:\cop680\pcd\chemsep1.pcd [CHANGED]

PCD File Manager

File Edit Tools Help

Information: PCD library generated on 3/12/2011 8:41:41 PM by rtaylor

Components (12):

- Hyp-01
- Hyp-02
- Hyp-03
- Hyp-04
- Hyp-05
- Hyp-06
- Hyp-07
- Hyp-08
- Hyp-09
- Hyp-10
- Hyp-11
- Hyp-12

Buttons: Up, Remove, Down, Add New

Search: - not matched - Find Next

Hyp-12

Component Critical Molecular T Correlations Group Data EOS Miscellaneous Log

Key	Value
Liquid molar volume at normal boiling point (m3/kmol)	0.256409
Acentric factor (-)	0.658167
Radius of gyration (m)	6.46627E-10
Solubility parameter (J0.5/m1.5)	13979.2
Dipole moment (Coulomb.m)	*
Van der Waals volume (m3/kmol)	*
Van der Waals area (m2/kmol)	*
IG heat of formation (J/kmol)	*
IG Gibbs energy of formation (J/kmol)	*
IG absolute entropy (J/kmol/K)	*
Heat of fusion at melting point (J/kmol)	*
Standard net heat of combustion (J/kmol)	1.04365E+10

Estimate: Apply

Order by property Order by method

c:\cop680\pcd\chemsep1.pcd [CHANGED]

PCD File Manager

Information: PCD library generated on 3/12/2011 8:41:41 PM by rtaylor

Components (12):

- Hyp-01
- Hyp-02
- Hyp-03
- Hyp-04
- Hyp-05
- Hyp-06
- Hyp-07
- Hyp-08
- Hyp-09
- Hyp-10
- Hyp-11
- Hyp-12

Buttons: Up, Remove, Down, Add New

Search: Find Next

Estimate: Apply

Component | Critical | Molecular | T Correlations | Group Data | EOS | Miscellaneous | Log

Key	Value
COSTLD characteristic volume (V*) (m3/kmol)	0.962036
Lennard Jones diameter (m)	9.09220E-10
Lennard Jones energy (K)	375.496
Rackett parameter (-)	0.259836
Fuller et al. diffusion volume (-)	317.338
Surface tension at normal boiling point (N/m)	0.00972038
Parachor (kg0.25.m3/s0.5/kmol)	0.0605352
Specific gravity (-)	0.834000
Charge (-)	*
Wilson volume (m3/kmol)	0.256409
UNIQUAC r (-)	*
UNIQUAC q (-)	*
UNIQUAC q' (-)	*

c:\cop680\pcd\chemsep1.pcd [CHANGED]

PCD File Manager

Information: PCD library generated on 3/12/2011 8:41:41 PM by rtaylor

Components (12):

- Hyp-01
- Hyp-02
- Hyp-03
- Hyp-04
- Hyp-05
- Hyp-06
- Hyp-07
- Hyp-08
- Hyp-09
- Hyp-10
- Hyp-11
- Hyp-12

Buttons: Up, Remove, Down, Add New

Search: Find Next

Estimate: Apply

Component | Critical | Molecular | T Correlations | Group Data | EOS | Miscellaneous | Log

Ideal gas heat capacity

Key	Value
Eq.No.	3
T min (K)	255.400
T max (K)	922.000
A	-8465.611
B	1196.306
C	-0.459721
D	*
E	*


Table | Plot | Settings | Data | Import | =

Click Left=mark/zoom, Right=settings Ln Copy Fit


Estimate: Apply

c:\cop680\pcd\chemsep1.pcd [CHANGED]


One last change, before we save the file is shown below. Here we have renamed the compounds so that they are identified by the sequence of letters starting with A. This change is not necessary and is done here solely to be consistent with the names used by Shah and Bishnoi.

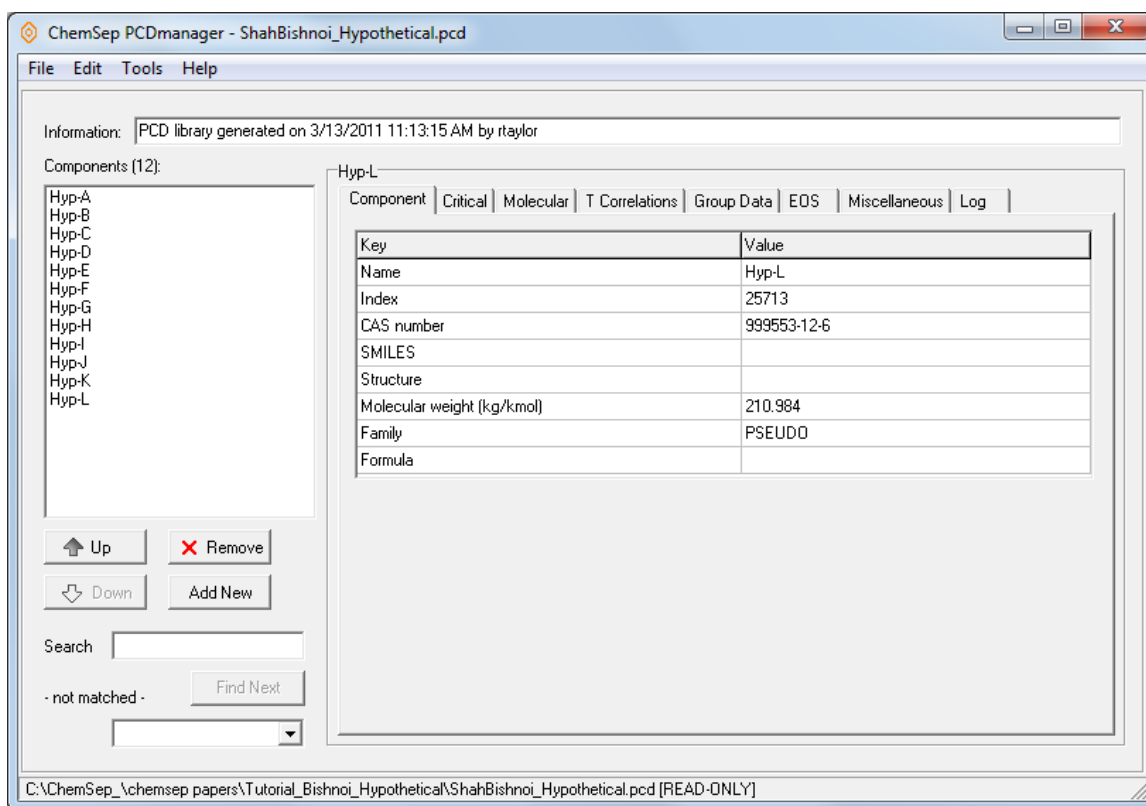

In order to use this new compound data bank in column simulations we must save it. Click on *File* and then select *Save As*:

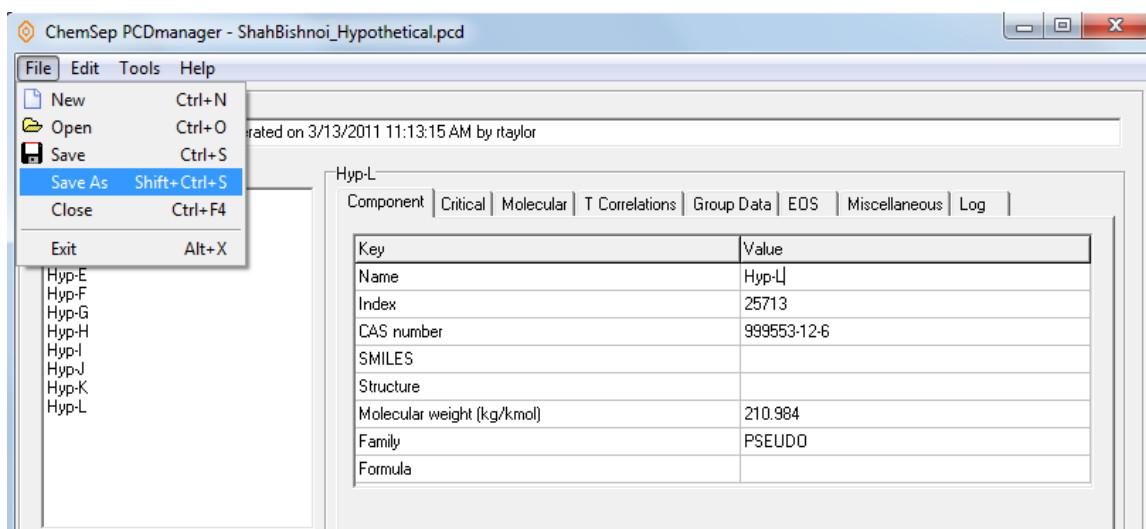

This will bring up the file save window where we give the file a name and find somewhere to save it:

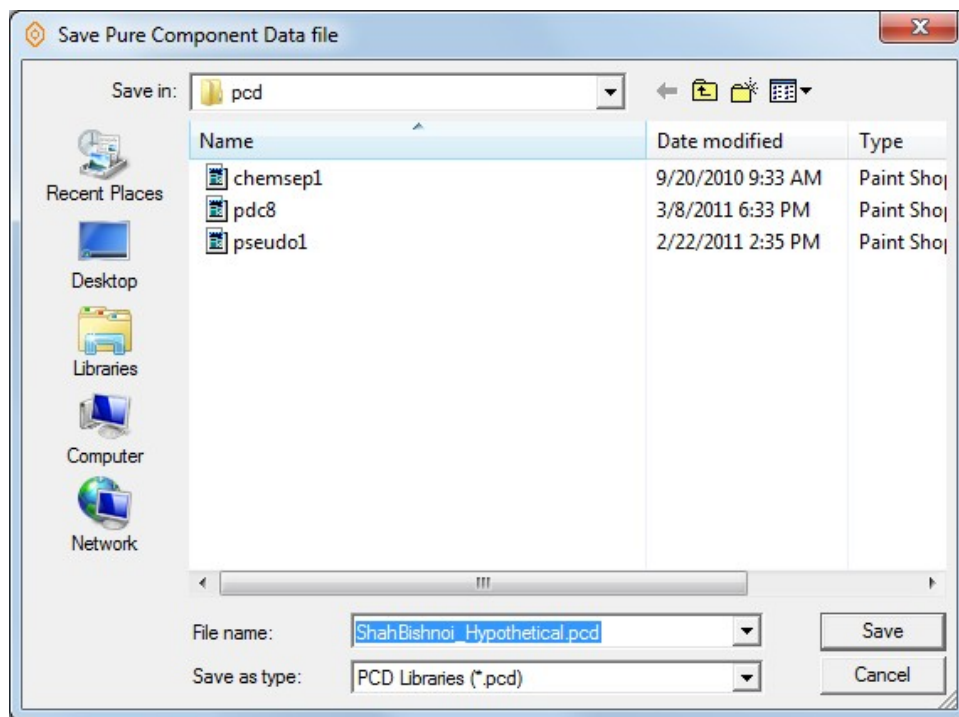


ChemSep pure compound data banks use the extension *pcd*. These three letters are sometimes used as the extension for files used by the program *Paint Shop*. It is for this reason that we see in the image above that our databank files appear to be associated with *Paint Shop*. We can always use the facilities of Windows to re-assign our *pcd* file to *ChemSep*, but we have not bothered to do that here.


The new data bank now is ready for use and we can proceed to model the column described in the paper by Shah and Bishnoi.

Compound Selection

We begin by returning to *ChemSep* and selecting compounds. Click on *Components* in the list on the left. Then, use the *Browse* button to locate the compound data file that we have just created:

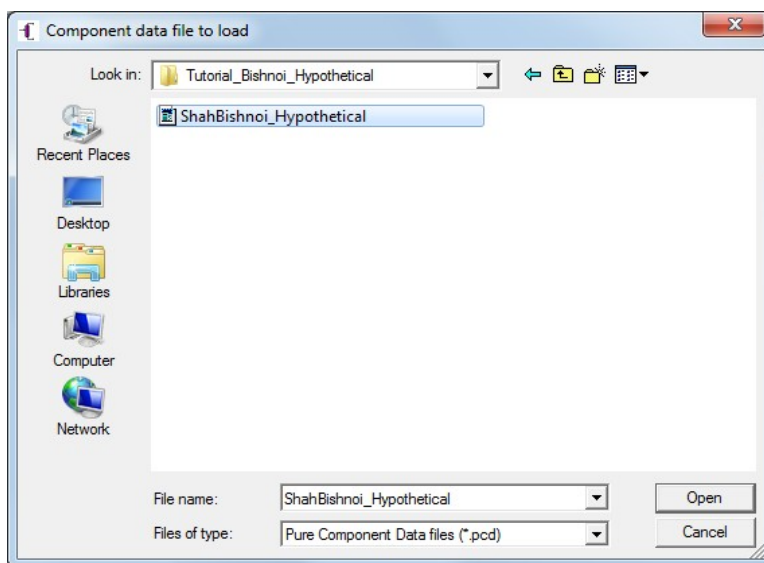

Select this file (this will return us to the *ChemSep* component selection panel which should now look something like this:

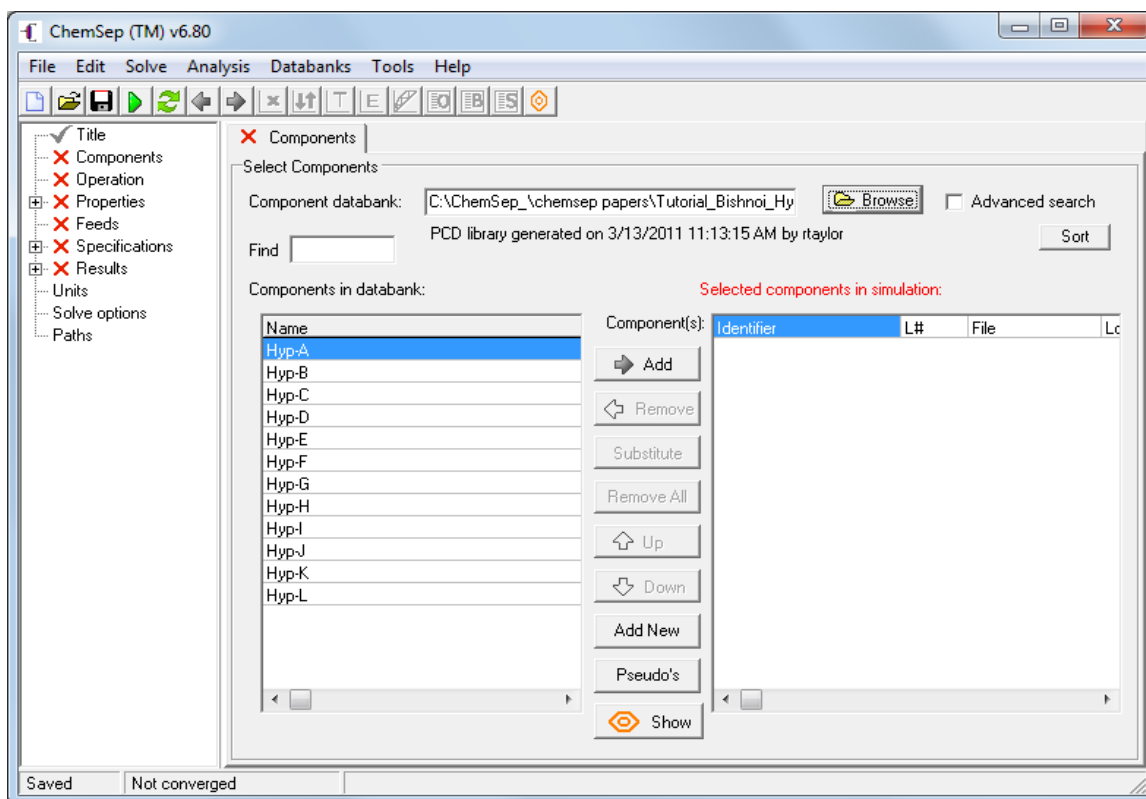


We can select all of these compounds in one go by proceeding as follows:

Click on the first compound in the list to the left of the compounds panel.


Hold down the *Shift* key

Click on the name of the last compound in the list.

We should now see all (except the first) compounds highlighted:

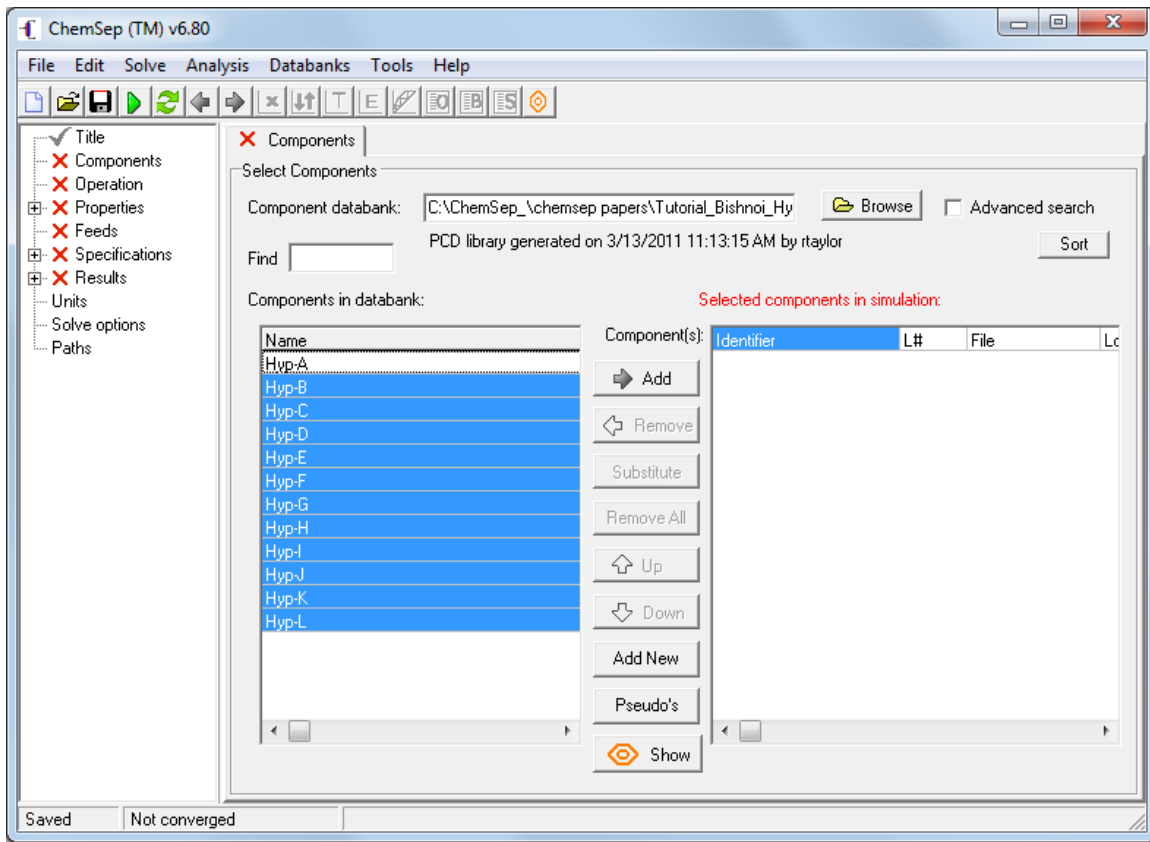

Click on the *Add* button to include all of these compounds in the simulation.

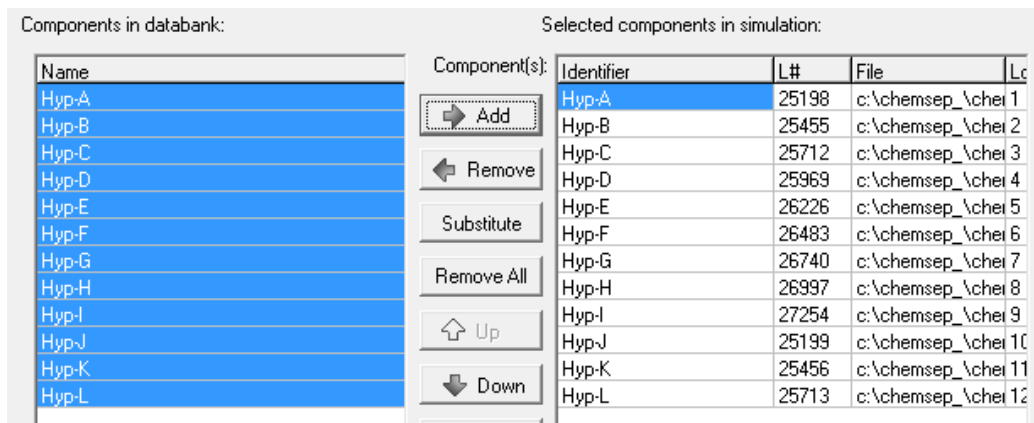

Operation

We select an *Equilibrium Column* and create a column configuration to match that shown above.

The screenshot displays the ChemSep (TM) software interface for configuring a column. The window title is "ChemSep (TM) - Bishnoi_column01.sep". The menu bar includes File, Edit, Solve, Analysis, Databanks, Tools, and Help. The left sidebar shows a tree view with "Operation" selected. The main configuration area is titled "Operation" and includes the following settings:


- Select Type of Simulation:
 - Flash
 - Equilibrium column
 - Nonequilibrium column
 - Dynamic column
- Configuration:
 - Operation: Complex Column
 - Condenser: Total (Liquid product)
 - Reboiler: Partial (Liquid product)
 - Number of stages (e.g. 10): 40
 - Feed stage(s) (e.g. 5,7): 27
 - Sidestream stage(s) (e.g. 2,9): 12
 - Pumparound(s) (e.g. 6>8, 9>1):

On the right, a schematic diagram of the column is shown. It features a vertical distillation column with a reboiler at the bottom (stage 40) and a condenser at the top (stage 1). The feed stage is labeled 27. A sidestream is drawn at stage 12. The column is divided into sections by dashed lines at stages 2, 12, 27, and 39. The top product is labeled "Top" and the bottom product is labeled "Bottom".

At the bottom of the window, the status bar shows "Changed", "Converged 6 iterations", and the file path "C:\ChemSep_\chemsep papers\Tutorial_Bishnoi_Hypothetical\Bishnoi_column01.sep".

Thermodynamic Model Selection


In their paper, Shah and Bishnoi use the SRK, PR EOS models as well as the Chao-Seader method to model a series of columns, one of which is the subject of this tutorial. For this tutorial we will make the selections shown below:

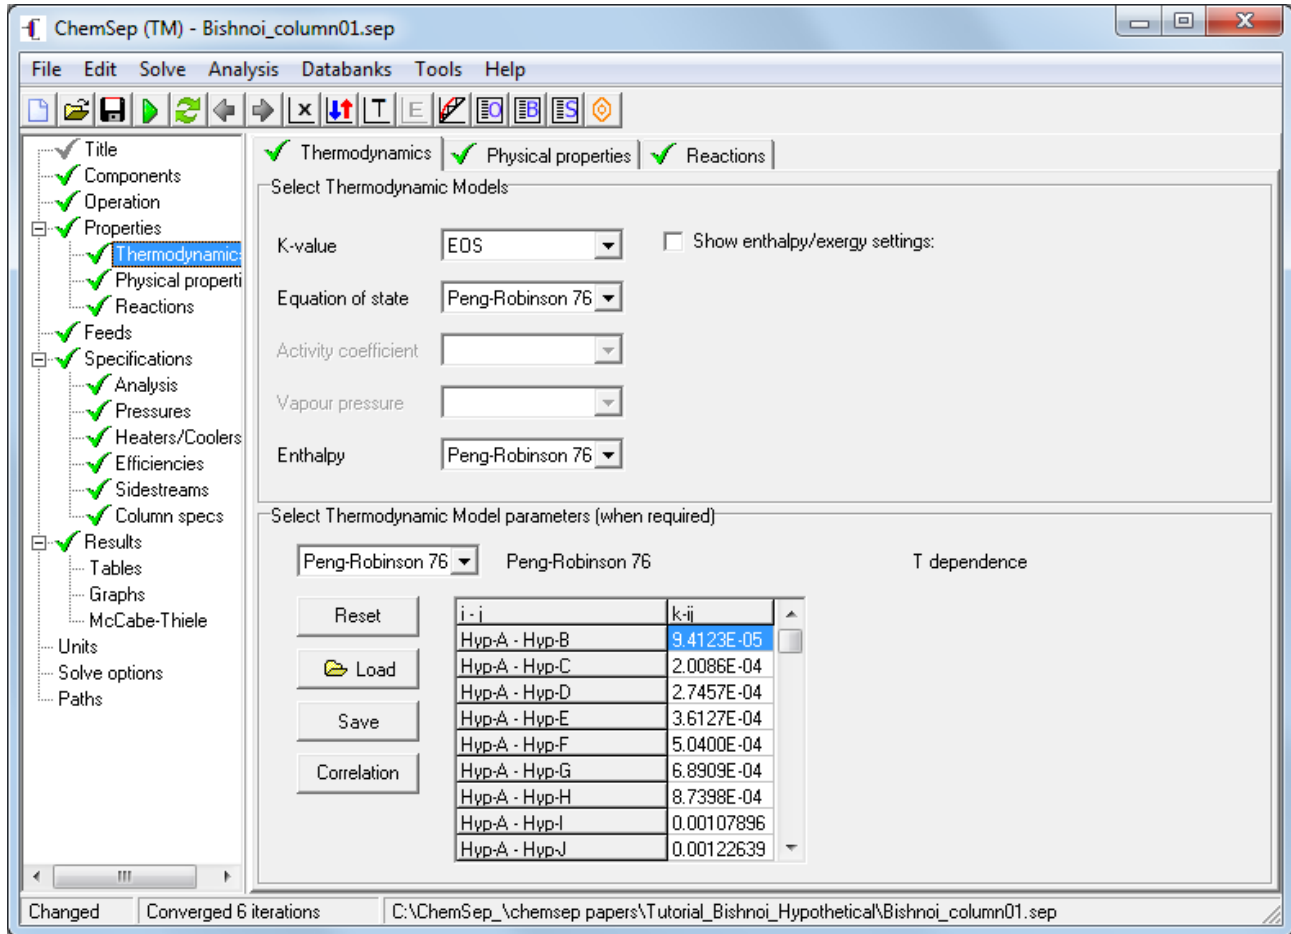

We have selected the Peng-Robinson EOS for this exercise.

Since binary interaction parameters are not available for this system from experimental data we have used the *Correlation* button to estimate them. Most of these interaction parameters are small and will not have a significant impact on the results of a simulation.

Feeds

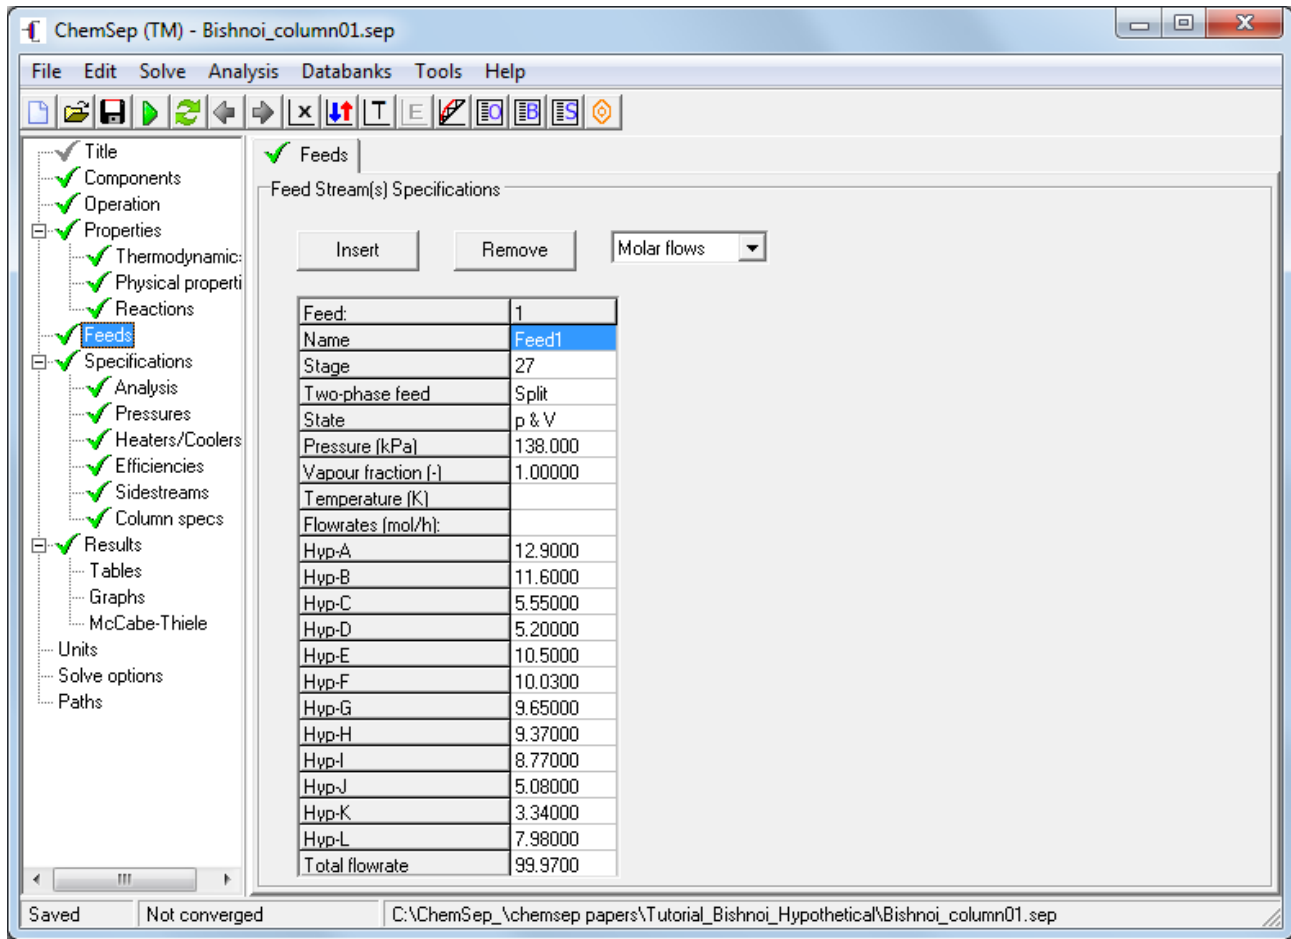

ChemSep (TM) - Bishnoi_column01.sep

File Edit Solve Analysis Databanks Tools Help

✓ Title
✓ Components
✓ Operation
✓ Properties
 ✓ Thermodynamic:
 ✓ Physical properti
 ✓ Reactions
 Feeds
 ✓ Specifications
 ✓ Analysis
 ✓ Pressures
 ✓ Heaters/Coolers
 ✓ Efficiencies
 ✓ Sidestreams
 ✓ Column specs
 ✓ Results
 ... Tables
 ... Graphs
 ... McCabe-Thiele
 ... Units
 ... Solve options
 ... Paths

✓ Feeds

Feed Stream(s) Specifications

Insert Remove Molar flows


Feed:	1
Name	Feed1
Stage	27
Two-phase feed	Split
State	p & V
Pressure (kPa)	138.000
Vapour fraction (-)	1.00000
Temperature (K)	
Flowrates (mol/h):	
Hyp-A	12.9000
Hyp-B	11.6000
Hyp-C	5.55000
Hyp-D	5.20000
Hyp-E	10.5000
Hyp-F	10.0300
Hyp-G	9.65000
Hyp-H	9.37000
Hyp-I	8.77000
Hyp-J	5.08000
Hyp-K	3.34000
Hyp-L	7.98000
Total flowrate	99.9700

Saved Not converged C:\ChemSep_\chemsep papers\tutorial_Bishnoi_Hypothetical\Bishnoi_column01.sep

The feed vapor fraction is set to unity to match the specification by Shah and Bishnoi that the feed is at its dew point.

Pressures

The column pressure is constant at 138 kPa:

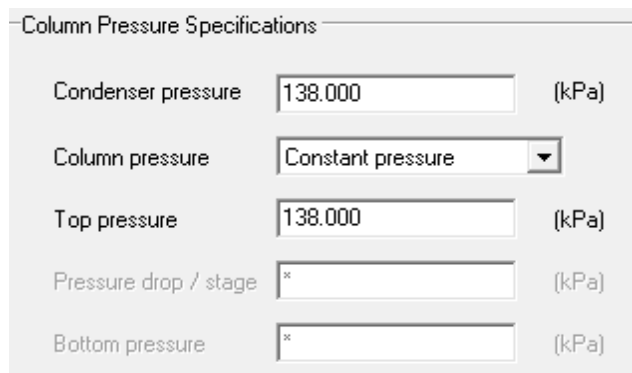

Column Pressure Specifications

Condenser pressure 138.000 (kPa)

Column pressure Constant pressure

Top pressure 138.000 (kPa)

Pressure drop / stage * (kPa)

Bottom pressure * (kPa)

Heaters and Coolers

There are no heaters and coolers other than the condenser and reboiler:

Define Column Heat Exchangers

Column heat loss: (J/s)

Name column duty:

Stage heat exchangers:

Efficiencies

The efficiencies are set to their default value of unity and so this panel is not shown here.

Sidestreams


The sidestream is specified as shown in the next image:

Sidestreams

Sidestream:	1
Name	Sidestream1
Stage	12
Phase	Liquid
Type	Total flow
Flow ratio [-]	
Flowrate [mol/h]:	58.0000

Column Specifications


Shah and Bishnoi specified the reflux flow ratio (with a value of 6.6). However, as noted above, they do not state what “other” variable was specified to completely account for the number of degrees of freedom for this column. (As an aside we note that Shah and Bishnoi are similarly vague in their descriptions of four other test problems. Interestingly, they do tell us that they modeled the total condenser as a partial condenser with a very small vapor flow rate. This was the only way their computer program could model columns with a total condenser and does not complete the missing degree of freedom.) The tables of results given in the original paper of Shah and Bishnoi allow one to invent several possible additional specifications (such as the bottoms flow rate, component recoveries or purities in the top or bottom products, reboiler or condenser heat duties and so on). We have selected the bottoms rate and the column specifications are then as follows:

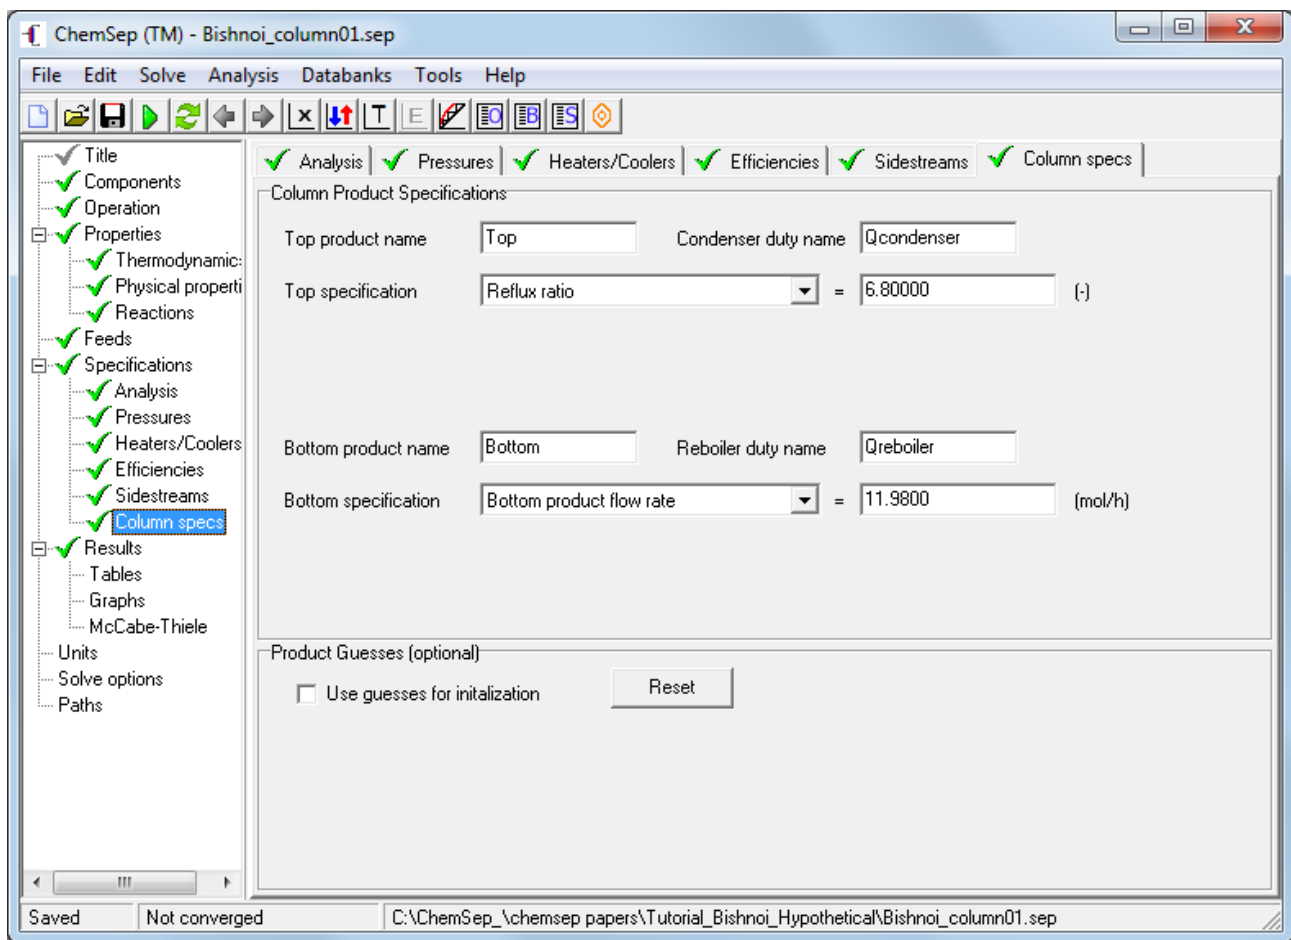

This completes the entry of the problem specifications. Save the file.

Solving the Simulation

With 40 stages and 12 components the equilibrium stage model has 1080 equations to be solved for 1080 variables (the unknown flow rates, temperatures, mole fractions). Convergence was obtained in just 6 iterations.

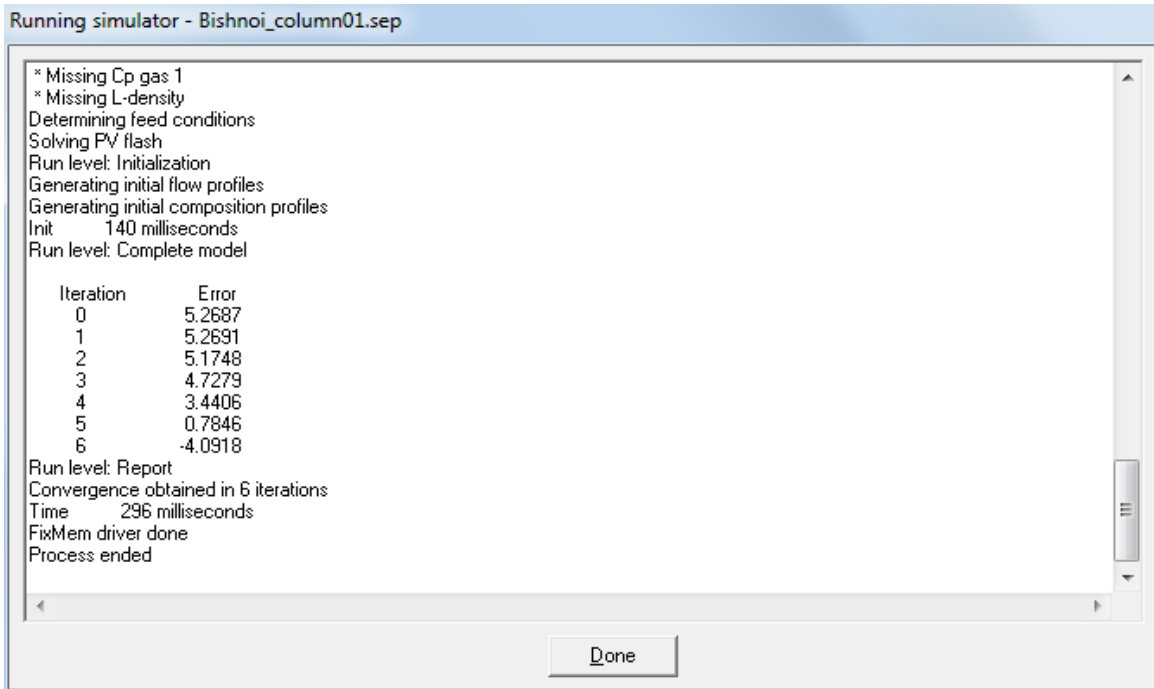

```
Running simulator - Bishnoi_column01.sep
* Missing Cp gas 1
* Missing L-density
Determining feed conditions
Solving PV flash
Run level: Initialization
Generating initial flow profiles
Generating initial composition profiles
Init      140 milliseconds
Run level: Complete model

  Iteration      Error
    0           5.2687
    1           5.2691
    2           5.1748
    3           4.7279
    4           3.4406
    5           0.7846
    6          -4.0918

Run level: Report
Convergence obtained in 6 iterations
Time      296 milliseconds
FixMem driver done
Process ended
```

Done

Results

The stream table is shown below:

Stream	Feed1	Top	Bottom	Sidestream
Stage	27	1	40	12
Pressure (kPa)	138.000	138.000	138.000	138.000
Vapour fraction (-)	1.00000	0.000000	0.000000	0.000000
Temperature (K)	507.775	431.416	558.795	488.847
Enthalpy (J/mol)	62116.2	-8430.38	55276.6	13519.2
Entropy (J/mol/K)	173.084	3.74263	163.185	73.7289
Mole flows (mol/h)				
Hyp-A	12.9000	11.9401	2.8686E-14	0.959895
Hyp-B	11.6000	9.75401	2.6559E-11	1.84599
Hyp-C	5.55000	3.92998	4.0392E-10	1.62002
Hyp-D	5.20000	2.50186	2.8998E-09	2.69814
Hyp-E	10.5000	1.75079	4.7124E-08	8.74921
Hyp-F	10.0300	0.110428	1.1242E-06	9.91957
Hyp-G	9.65000	0.00276555	5.3835E-05	9.64718
Hyp-H	9.37000	1.0416E-04	0.00175358	9.36814
Hyp-I	8.77000	1.9676E-06	0.130785	8.63921
Hyp-J	5.08000	1.3466E-07	0.749787	4.33021
Hyp-K	3.34000	2.1666E-10	3.11787	0.222135
Hyp-L	7.98000	2.6057E-16	7.97976	2.4612E-04
Total molar flow	99.9700	29.9900	11.9800	58.0000

The component flows differ slightly from those given by Shah and Bishnoi, but the essential nature of the component split is preserved. Note that the sidestream flow is significantly greater than either the top or bottom product flow rate.

The material and energy balance table shows the main mass and energy flows into and out of the column:

Mass and Energy Balances


Stream / Apparatus	Mass (mol/h)	Energy (J/s)	Exergy (J/s)
Feed1	99.9700	1724.93	291.891
Top	-29.9900	70.2299	79.5256
Bottom	-11.9800	-183.948	-22.0400
Sidestream1	-58.0000	-217.810	136.349
Qcondenser		-2629.55	-812.278
Qreboiler		1236.35	576.684
Balance	0.000000	0.199951	250.133

Thermodynamic efficiency = 0.485033


Component discrepancies: absolute (mol/h), relative ()

Hyp-A	-2.609E-07	-2.022E-08
Hyp-B	-2.642E-07	-2.278E-08
Hyp-C	-4.796E-09	-8.642E-10
Hyp-D	2.6892E-07	5.1717E-08
Hyp-E	4.4314E-07	4.2204E-08
Hyp-F	7.5176E-07	7.4951E-08
Hyp-G	-6.832E-07	-7.079E-08
Hyp-H	-5.826E-07	-6.218E-08
Hyp-I	5.6736E-07	6.4693E-08
Hyp-J	2.7893E-07	5.4908E-08
Hyp-K	6.1380E-08	1.8377E-08
Hyp-L	3.5933E-07	4.5029E-08

The temperature and flow profiles is obtained by clicking on the appropriate icons on the button bar.

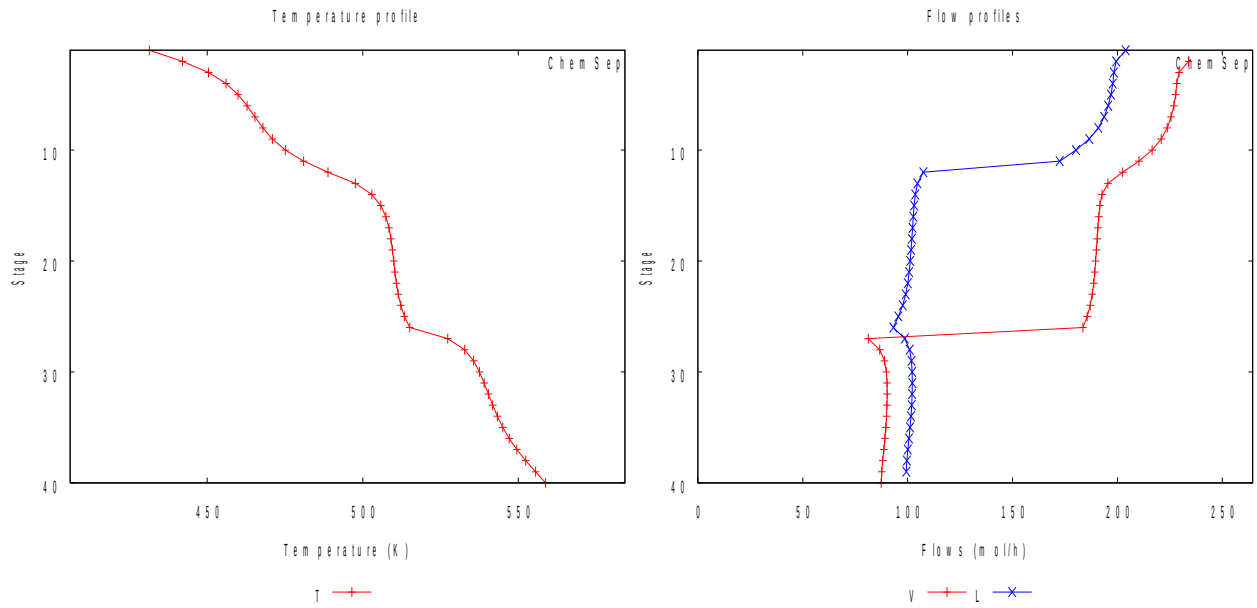

The composition profiles are shown below.

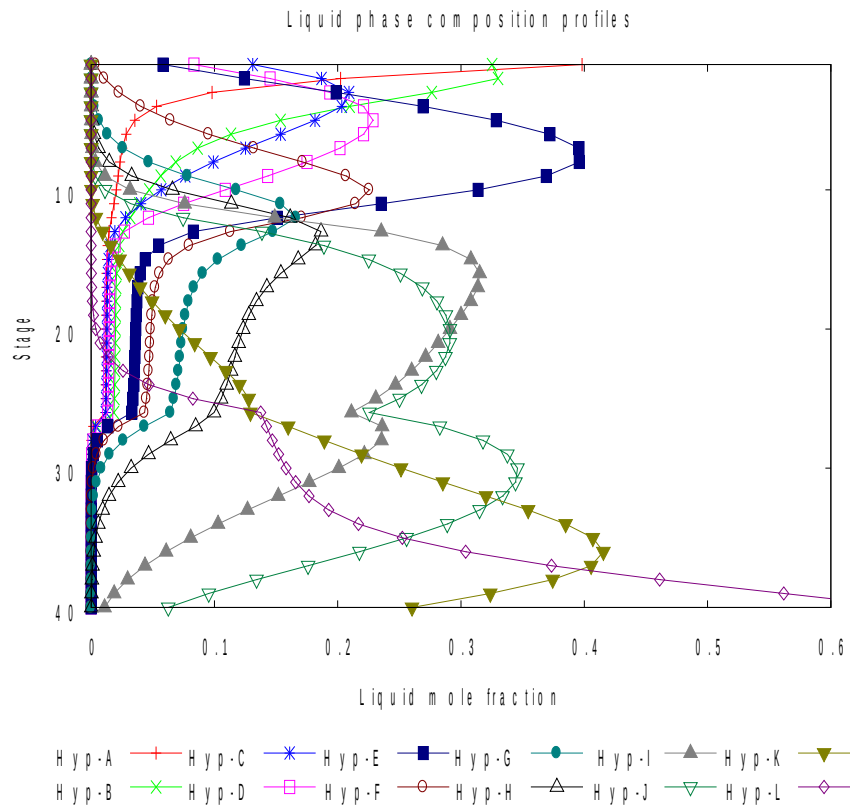

A McCabe-Thiele diagram can be obtained by clicking on the McCabe-Thiele icon on the button bar. We may also elect to select the McCabe-Thiele panel:

The screenshot shows the ChemSep software interface with the McCabe-Thiele panel active. The panel contains a table of stage data and control options for selecting key components.

Stage	KL	KH	RV	dy*/dx	xL	xH	E-O'Connell	DV (m ² /s)
2	0.171445	0.116275	1.474483	0.690188	0.972904	0.0270964	0.62063	2.0908E-06
3	0.219976	0.151096	1.455874	0.703812	0.961335	0.0386646	0.629396	2.1604E-06
4	0.258577	0.17909	1.443834	0.716497	0.945291	0.0547086	0.634795	2.2079E-06
5	0.287912	0.200515	1.435867	0.730013	0.923366	0.0766343	0.638247	2.2406E-06
6	0.311781	0.218029	1.429996	0.746128	0.893955	0.106045	0.640726	2.2655E-06
7	0.333698	0.23417	1.425026	0.766413	0.855425	0.144575	0.642778	2.2872E-06
8	0.357101	0.25146	1.42011	0.792301	0.806456	0.193544	0.644759	2.3093E-06
9	0.386605	0.273334	1.414405	0.824969	0.746582	0.253418	0.646992	2.3357E-06
10	0.429666	0.305407	1.406864	0.864932	0.676803	0.323197	0.649837	2.3717E-06
11	0.497432	0.356221	1.396415	0.911372	0.599941	0.400059	0.65362	2.4235E-06
12	0.600101	0.433927	1.382953	0.961622	0.52024	0.47976	0.658299	2.4931E-06
13	0.733363	0.535916	1.368428	1.011932	0.442097	0.557903	0.663184	2.5720E-06
14	0.823736	0.605711	1.35995	1.045961	0.389664	0.610336	0.665966	2.6200E-06
15	0.876839	0.646931	1.355381	1.070098	0.352949	0.647051	0.667431	2.6466E-06
16	0.907499	0.670796	1.35287	1.086661	0.328127	0.671873	0.668214	2.6614E-06
17	0.926211	0.685381	1.351381	1.097272	0.312387	0.687613	0.668663	2.6703E-06
18	0.938779	0.695186	1.3504	1.103403	0.303304	0.696696	0.668946	2.6763E-06
19	0.948287	0.702607	1.34967	1.10634	0.29888	0.70112	0.669147	2.6807E-06

Control options for the McCabe-Thiele panel:

- Auto-select key components
 - Criterion: Stripping and K values
 - Light key: Hyp-H
 - Heavy key: Hyp-I
- User selected key components
- Lumped
- Show settings


ChemSep will select the key components to be used in this diagram, but it does not always make the best choice. The program contains three different criteria on which to base its selection of the keys:

Close-up of the McCabe-Thiele panel control options:

- Auto-select key components
 - Criterion: Stripping and K values
 - Light key: Hyp-H
 - Heavy key: n-Butane
- User selected
 - Dropdown menu options: Stripping and K values, Largest mass transfer rates, Net flux
- Lumped
- Show settings

In this particular case the best choice is given by using the *Stripping and K-values* as the criterion. The other options lead (in this case) to a different pair of compounds. Alternatively, one can select the key components directly.

Click on the *Display* button to see the actual McCabe-Thiele diagram shown below:

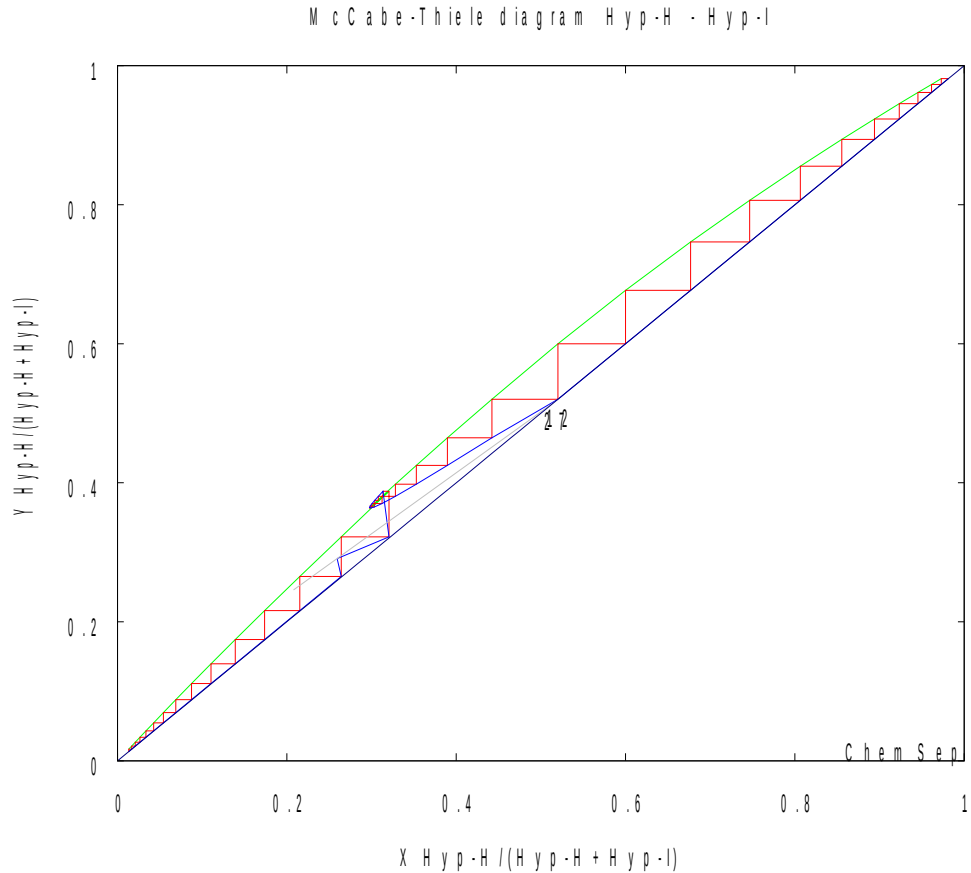

Discussion

The original paper of Shah and Bishnoi was ostensibly to describe how a computational method for solving column simulation problems developed by Y. Ishii and F.D. Otto (*Can. J. Chem. Eng.*, **51**, 601, 1973) could be improved so that it could be used to solve systems where the thermodynamic properties were obtained from cubic equations of state. They also documented some other improvements to the original method and illustrated its use by solving 5 example problems of which the one solved here was number 5. Shah and Bishnoi used a CDC CYBER 172 computer and they report that their computer program needed 6 iterations to solve this example in slightly less than 41 seconds. *ChemSep* also needed 6 iterations (although the methods are not exactly the same so any comparison is somewhat lacking in context) and less than one third of one second on a 1.8 GHz Dell Precision Laptop Computer. These numbers only provide a measure of how much computer technology has advanced from 1978 to 2011 when this tutorial was written.

More interesting, perhaps, is that Shah and Bishnoi reported that the Chao-Seader model failed to solve this particular problem. *ChemSep* will solve this simulation using the Chao-Seader model in the same number of iterations (6) and in about the same amount of computer time as is needed for the Peng-Robinson EOS. Shah and Bishnoi report that for columns at low temperatures the

results from the Chao-Seader model are very different from those with the SRK or PR equations of state. This conclusion does not appear to be valid In this particular case.

Exercises

Repeat this simulation with the following changes:

1. The SRK EOS.
2. The Chao-Seader model.
3. Recreate the pure compound data bank but use other methods to estimate the various properties noted on the pseudo-compound generation panel. Do the simulation results differ very much if an alternative method was used for estimating the critical temperature and pressure and the ideal gas heat capacity?